


CONCRETE=0.05054 CUBIC YARDS PER LINEAR FT
 1 CY=19.7863 LINEAR FT.

TYPE "C-6" CURB & GUTTER
 N.T.S.

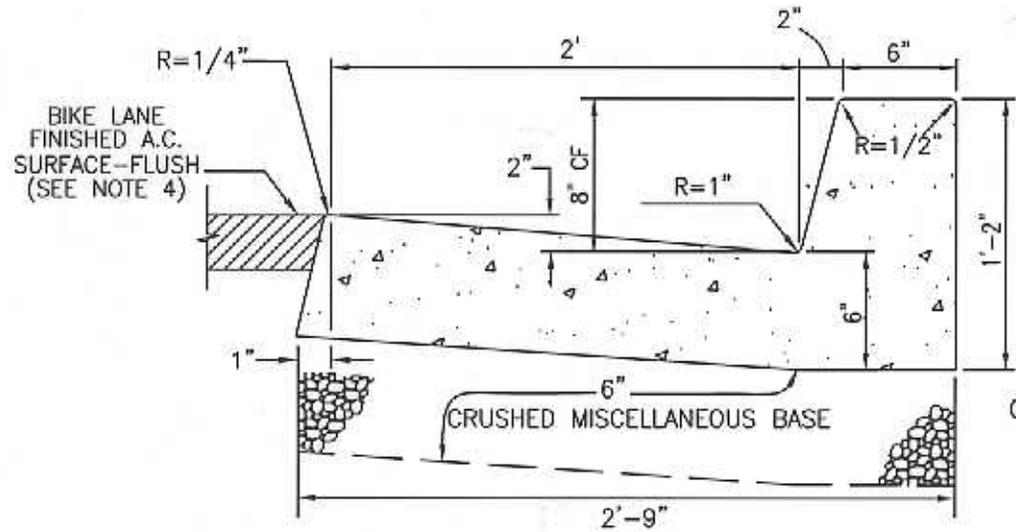

CONCRETE=0.0645 CUBIC YARDS PER LINEAR FT
 1 CY=15.50 LINEAR FT.

TYPE "C-8" CURB & GUTTER
 N.T.S.

NOTES:

1. 1/4" EXPANSION JOINTS SHALL BE PLACED AT 40' INTERVALS AND AT ALL BCR'S AND ECR'S. 1/8" x 2" WEAKENED PLANE JOINTS SHALL BE PLACED AT 10' INTERVALS. FOR JOINT DETAILS, SEE STD DWG NO 314.
2. CONCRETE SHALL BE CLASS 560-C-3250 (330-C-23) PER LATEST EDITION OF STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION SEC. 201-1.
3. SUBGRADE RELATIVE COMPACTION SHALL NOT BE LESS THAN 90%.
4. ALL AC FINISHED SURFACES SHALL HAVE A 3/8" LIP, EXCEPT AREAS WITH BIKE LANES AND MAJOR ARTERIALS, WHERE FINISHED AC SURFACE SHALL BE FLUSH WITH EDGE OF GUTTER.

CITY OF COSTA MESA PUBLIC SERVICES DEPARTMENT	TYPE "C" CURB & GUTTER	 Costa Mesa
RECOMMENDED  ERNESTO MUNOZ CITY ENGINEER		STD. DWG. NO. 312